

KE 155



EN: KE 155 series, which is the upper mounting model has been designed in a way to meet the anticipation in the site.

The KE 155 series was developed and structured in line with the recommendation and demands of architectures in the application field, it may be used in larger projects such as shopping malls and hotels. The thickness of the glass may be selected optionally between 12-21,52 millimeters.

FR: La série KE 155, qui est le modèle de montage supérieur, a été conçue de manière à répondre aux besoins du chantier.

La série KE 155 a été développée et structurée conformément aux recommandations et aux exigences des architectures dans le domaine, elle peut être utilisée dans des grands projets tels que les centres commerciaux et les hôtels. L'épaisseur du verre peut être choisie en option entre 12-21,52 millimètres.


DE: Die KE 155-Serie, bei der es sich um das obere Montagemodell handelt, wurde so konzipiert, dass die Erwartungen vor Ort erfüllt werden.

Die KE 155-Serie wurde gemäß den Empfehlungen und Anforderungen von Architekturen im Anwendungsbereich entwickelt und strukturiert und kann in größeren Projekten wie Einkaufszentren und Hotels eingesetzt werden.

KE 155 CODES

- KE 155.250.00
- KE 155.500.00

PROFILE DRAWING

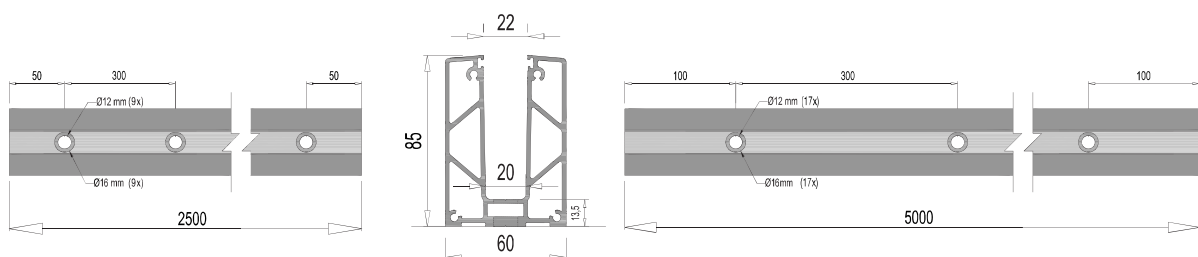



LOAD CAPACITY



EN: Aluminum alloy EN AW 6063 displacement results for 1 mt base profile under 500 kg (5000 nt) horizontal load to the highest surface of the profile.

FR: Alliage d'aluminium EN AW 6063 résultats de déplacement pour un profil de base de 1 mt sous une charge horizontale de 500 kg (5000 nt) sur la surface la plus élevée du profil.

DE: Die Verschiebung der Aluminiumlegierung EN AW 6063 ergibt ein Grundprofil von 1 m bei einer horizontalen Belastung von 500 kg (5000 nt) auf die höchste Oberfläche des Profils.




GLASS INFO

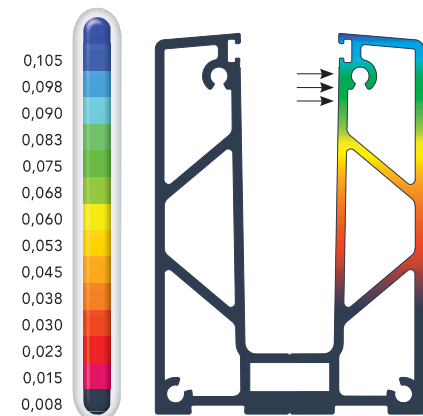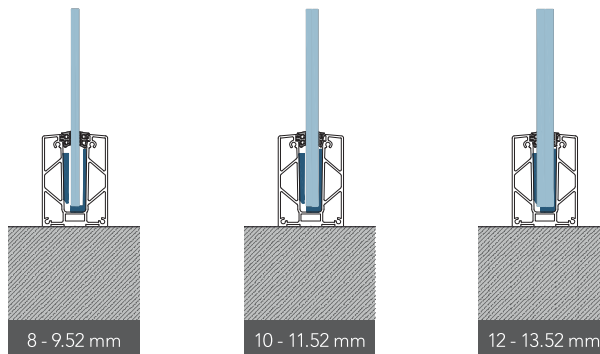


Kgf, cm, C

Displacement Values


ANCHORING POSSIBILITY FOR THE KE - 155

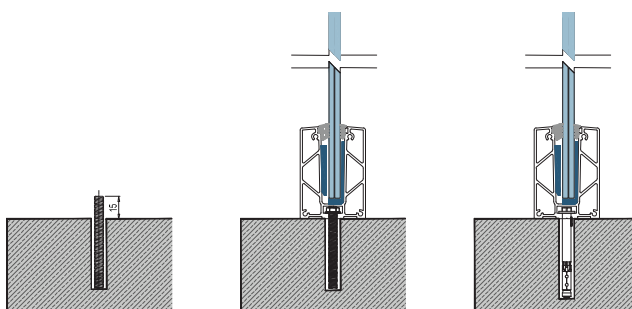


MAXIMUM HEIGHT




INSTALLATION PART I

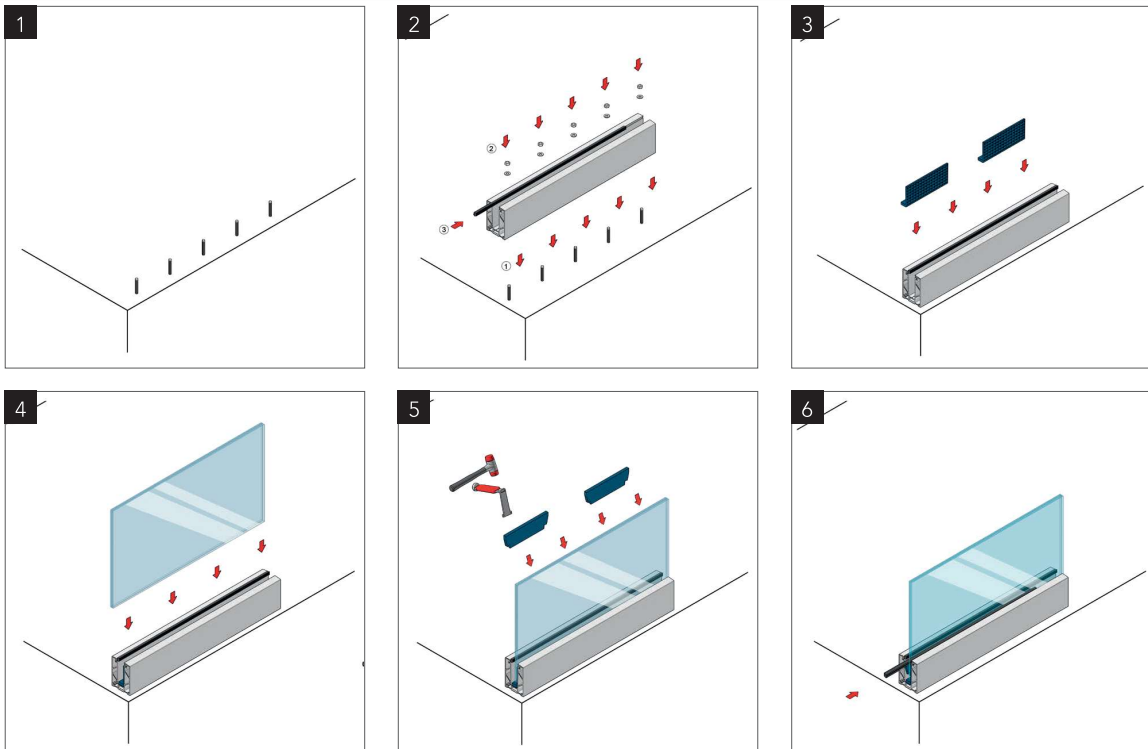

INSTALLATION PART II

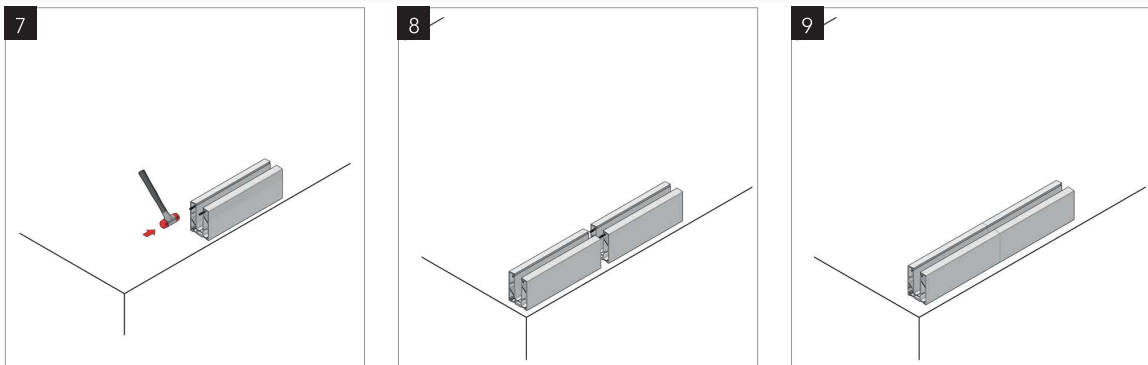

INSTALLATION PART III

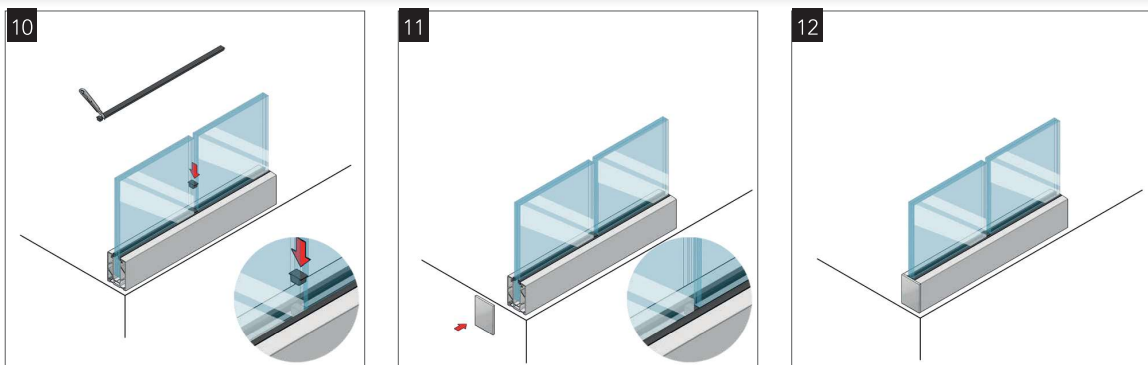

KE 155 - Glass Railing Systems



GLASS PROFILE KE 155

KE 155	MILL FINISH	MAT ANODISE	BRIGHT ANODISE	STAINLESS STEEL EFFECT	RAL COLOURED
Length	Code	Code	Code	Code	Code
2500 MM	155.250.10	155.250.20	155.250.30	155.250.40	155.250.50
5000 MM	155.500.10	155.500.20	155.500.30	155.500.40	155.500.50




CORNER 90°

INSIDE / OUTSIDE	MILL FINISH	MAT ANODISE	BRIGHT ANODISE	STAINLESS STEEL EFFECT	RAL COLOURED
	Code	Code	Code	Code	Code
	155.100.10	155.100.20	155.100.30	155.100.40	155.100.50



END CAP


LEFT / RIGHT	MILL FINISH	MAT ANODISE	BRIGHT ANODISE	STAINLESS STEEL EFFECT	RAL COLOURED
	Code	Code	Code	Code	Code
	155.120.10	155.120.20	155.120.30	155.120.40	155.120.50



FIXING ANCHOR M8x150

Code

9800.010.00



FIXING ANCHOR M8x110

Code

9800.015.00



FIXING ANCHOR M10x110

Code

9800.075.00

9800.110.00


9800.150.00



EXTENSION PIN M5x50

Code

9850.005.00



Glass Thickness	Colour	10 MT	PCS
		Code	Code
8 - 9.52 mm	GREEN	KE 10000.008.00	KE 0000.008.02
10 - 11.52 mm	BLUE	KE 10000.010.00	KE 0000.010.02
12 - 13.52 mm	BLACK	KE 10000.012.00	KE 0000.012.02